


EK  
EL  
FE  
GL  
LAB  
QS  
VK  
AK  
EL

DRAWING MADE IN EUROPEAN PROJECTION

All Rights Reserved

Copyright © PVL Electronic

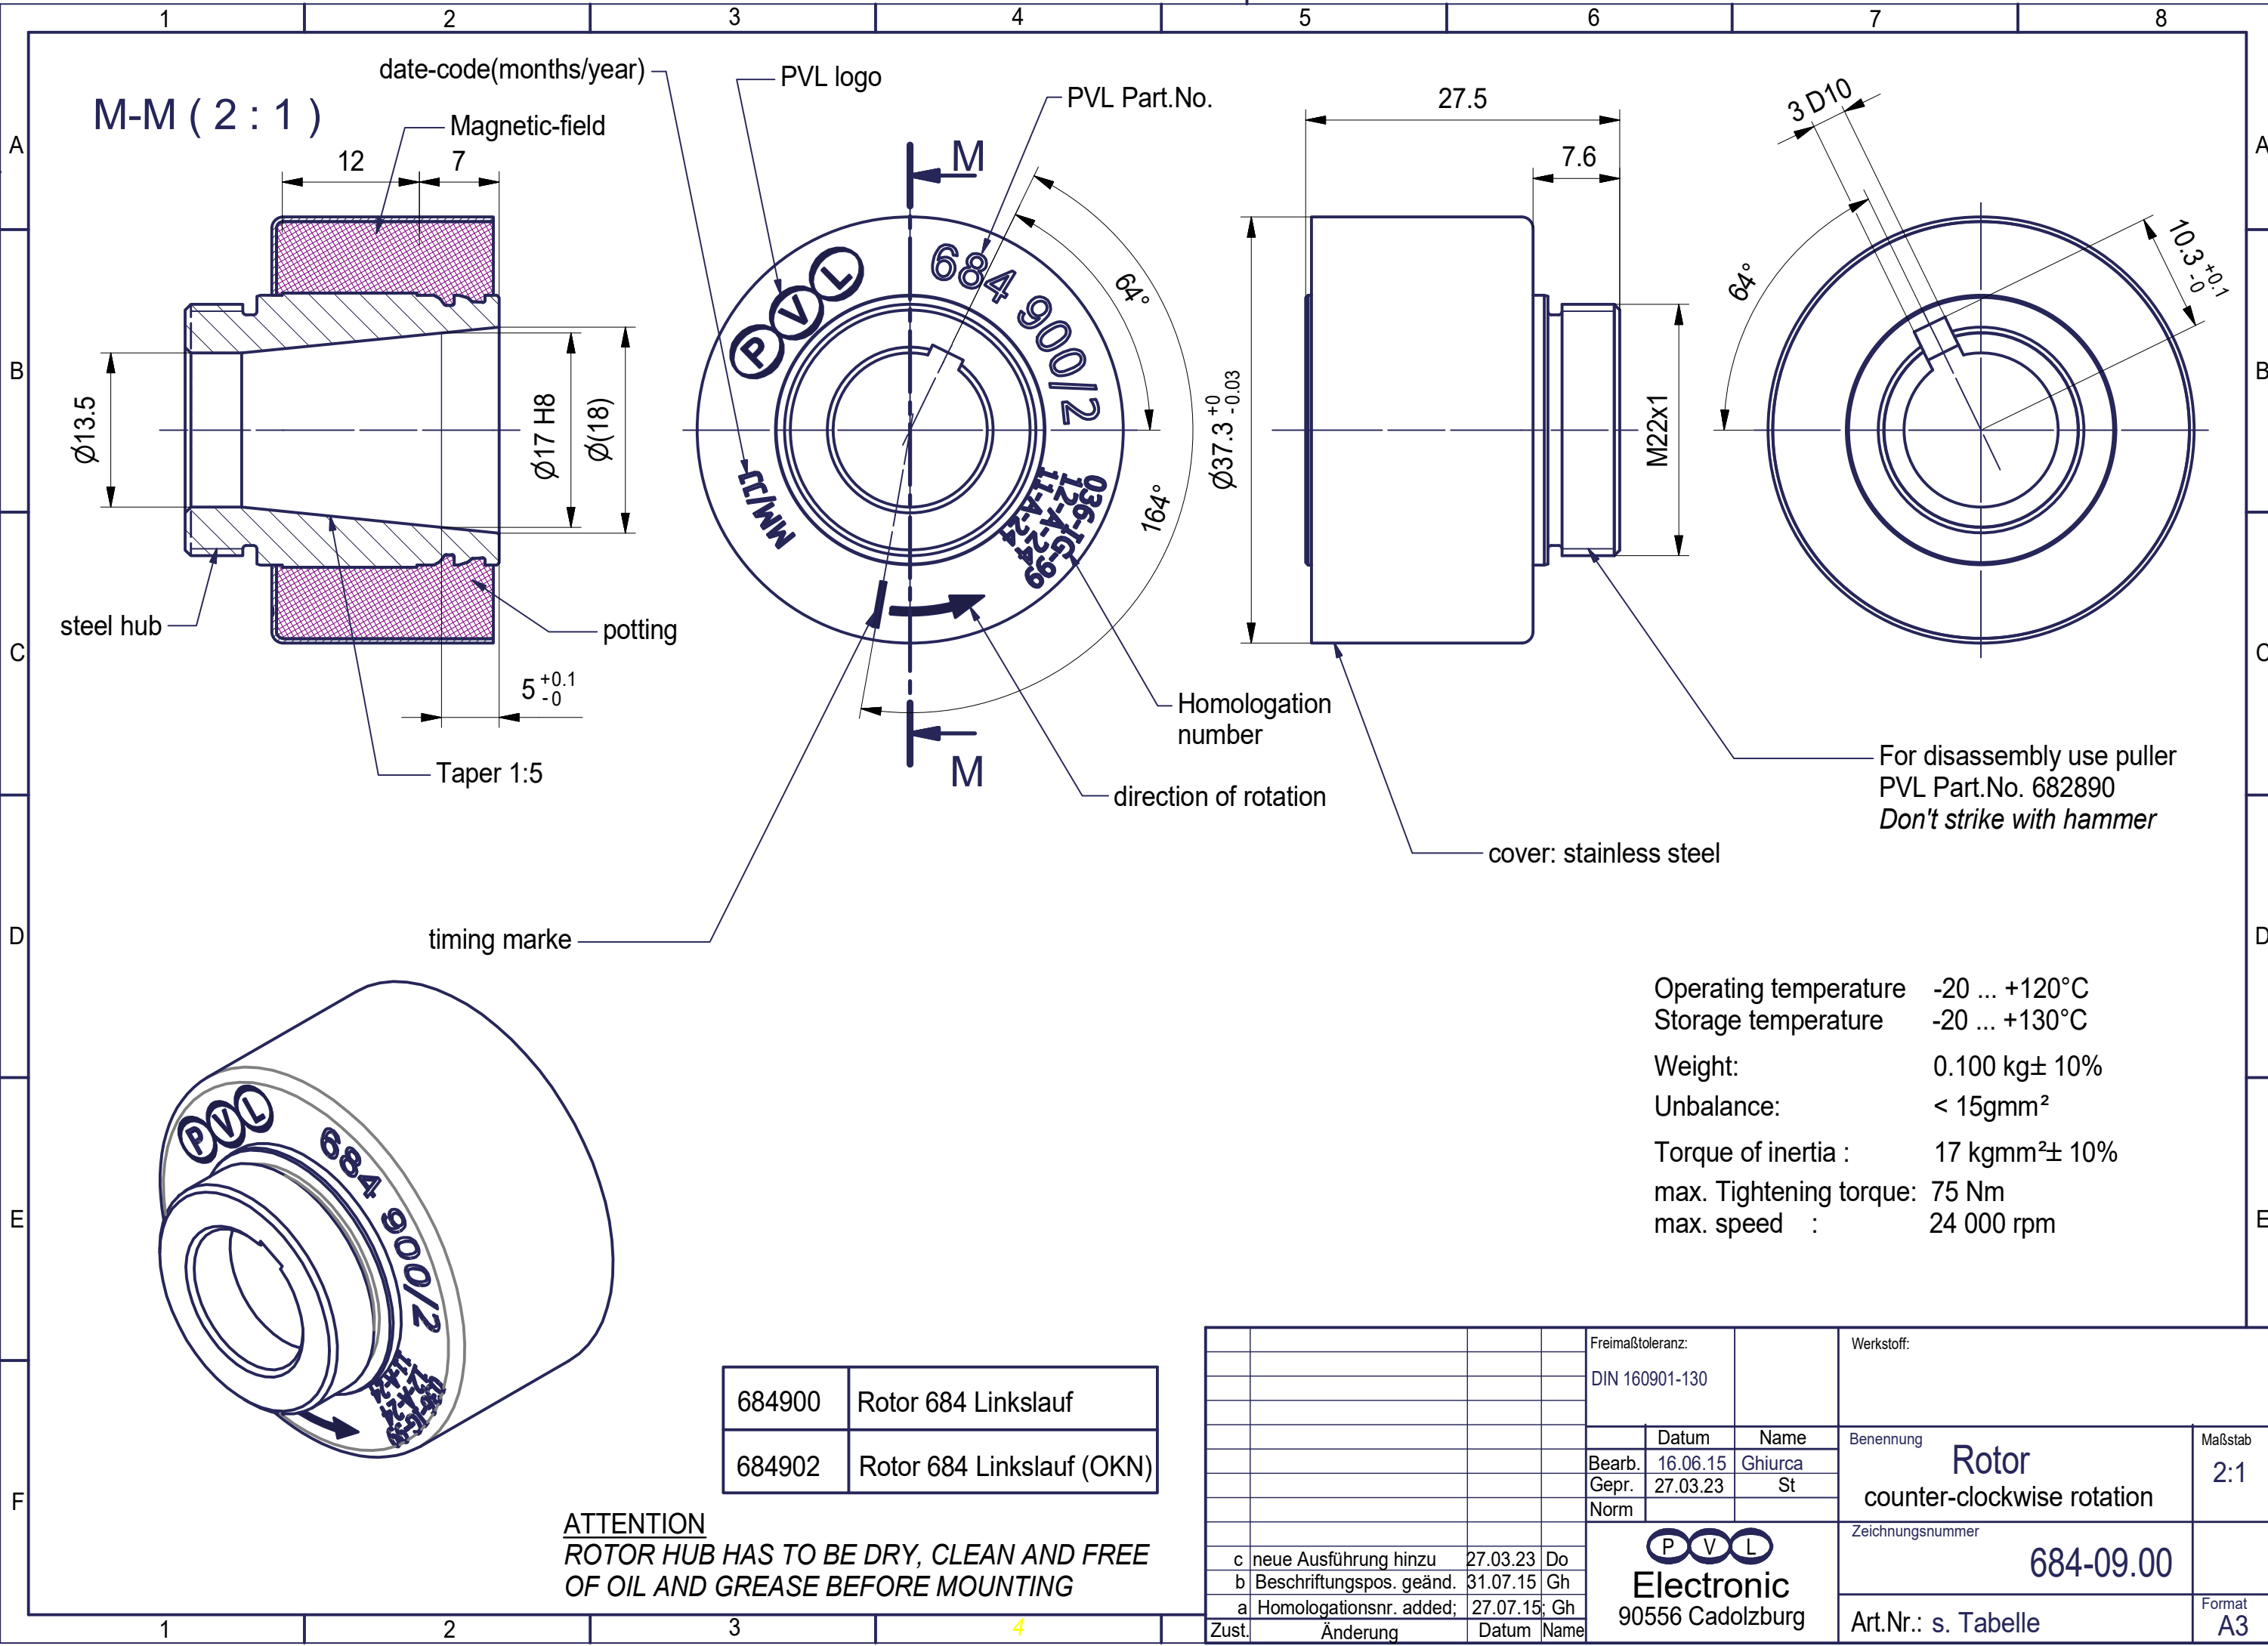

Operating temperature -20 ... +120°C  
 Storage temperature -20 ... +130°C  
 Weight: 0.100 kg± 10%  
 Unbalance: < 15gmm²  
 Torque of inertia : 17 kgmm²± 10%  
 max. Tightening torque: 75 Nm  
 max. speed : 24 000 rpm

For disassembly use puller  
 PVL Part.No. 682890  
 Don't strike with hammer

cover: stainless steel

684900	Rotor 684 Linkslauf
684902	Rotor 684 Linkslauf (OKN)

**ATTENTION**  
 ROTOR HUB HAS TO BE DRY, CLEAN AND FREE  
 OF OIL AND GREASE BEFORE MOUNTING

Freimaßtoleranz: DIN 160901-130		Werkstoff:	
Datum		Name	
Bearb.	16.06.15	Ghiurca	
Gepr.	27.03.23	St	
Norm			
c neue Ausführung hinzu		27.03.23	Do
b Beschriftungspos. geänd.		31.07.15	Gh
a Homologationsnr. added;		27.07.15	Gh
Zust.	Änderung	Datum	Name
 <b>Electronic</b> 90556 Cadolzburg		Benennung <b>Rotor</b> counter-clockwise rotation	
		Maßstab <b>2:1</b>	
Art.Nr.: s. Tabelle		Zeichnungsnummer <b>684-09.00</b>	
Format <b>A3</b>			